


FIG 903 - ELBOW 45°

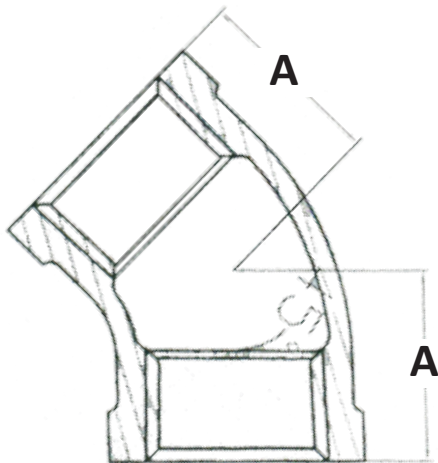

SIZE RANGE / DIMENSIONS

ITEM CODE	BSP	METRIC mm	A
903/0015	½"	15	22
903/0020	¾"	20	25
903/0025	1"	25	28
903/0032	1¼"	32	33
903/0040	1½"	40	36
903/0050	2"	50	43
903/0065	2½"	65	48.5
903/0080	3"	80	53.5
903/0100	4"	100	64.5
903/0150	6"	150	80

TECHNICAL DATA:

Maximum Pressure:

16 BAR (230PSI) (1.6MPA)

Maximum Temperature:

200°C (392°F)

Tensile Strength:

330MPA

Hardness:

HB150 (Brinell)

Elongation Rate:

8%

Suitable Applications:

Water, Oil, Gas, Petro-Chemical

Material:

Hot Dipped Malleable Iron

LONGER LASTING Heavy duty, hot dipped galvanised
PIN HOLE FREE Individually pressure tested
TAPERED THREADS Conform to (ISO 7-1) British standards