


FIG 905 - BEND 90° MxF

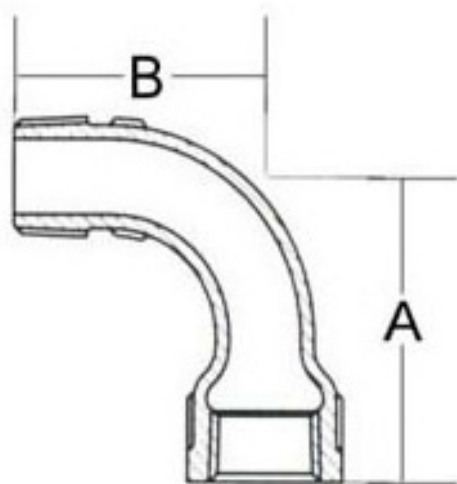

SIZE RANGE / DIMENSIONS

ITEM CODE	BSP	METRIC mm	A	B
905/0015	½"	15	48	42
905/0020	¾"	20	55	48
905/0025	1"	25	69	60
905/0032	1¼"	32	85	75
905/0040	1½"	40	105	95
905/0050	2"	50	116	105
905/0065	2½"	65	140	130
905/0080	3"	80	176	165
905/0100	4"	100	205	190

TECHNICAL DATA:

Maximum Pressure:

16 BAR (230PSI) (1.6MPa)

Maximum Temperature:

200°C (392°F)

Tensile Strength:

330MPa

Hardness:

HB150 (Brinell)

Elongation Rate:

8%

Suitable Applications:

Water, Oil, Gas, Petro-Chemical

Material:

Hot Dipped Malleable Iron

LONGER LASTING Heavy duty, hot dipped galvanised

PIN HOLE FREE Individually pressure tested

TAPERED THREADS Conform to (ISO 7-1) British standards