


FIG 915 - HEXAGON NIPPLE

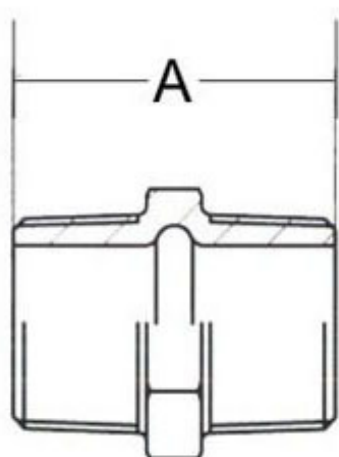

SIZE RANGE / DIMENSIONS

ITEM CODE	BSP	METRIC mm	A
915/0010	3/8"	10	
915/0015	1/2"	15	44
915/0020	3/4"	20	48
915/0025	1"	25	53
915/0032	1 1/4"	32	58
915/0040	1 1/2"	40	60
915/0050	2"	50	68
915/0065	2 1/2"	65	77
915/0080	3"	80	83
915/0100	4"	100	98

TECHNICAL DATA:

Maximum Pressure:

16 BAR (230PSI) (1.6MPa)

Maximum Temperature:

200°C (392°F)

Tensile Strength:

330MPa

Hardness:

HB150 (Brinell)

Elongation Rate:

8%

Suitable Applications:

Water, Oil, Gas, Petro-Chemical

Material:

Hot Dipped Malleable Iron

LONGER LASTING Heavy duty, hot dipped galvanised
PIN HOLE FREE Individually pressure tested
TAPERED THREADS Conform to (ISO 7-1) British standards