


FIG 917 - SWAGE NIPPLE

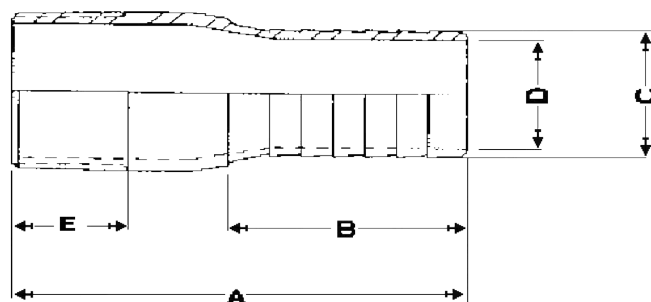

SIZE RANGE / DIMENSIONS										
ITEM CODE	BSP	METRIC mm	A	B	C	D	E	THICKNESS	WIDTH OF HOSE TOOTH	QTY OF HOSE TOOTH
917/0015	½"	15	79	38	16	11	15	2.50	5	6
917/0020	¾"	20	82	40	19.5	14.5	17	2.50	5	7
917/0025	1"	25	85	45	26	20	19	3.00	5	8
917/0032	1¼"	32	93	50	32.5	26.5	21	3.00	5	9
917/0040	1½"	40	100	55	39	32.5	22	3.25	7	6
917/0050	2"	50	115	55	51.5	45	25	3.25	7	7
917/0065	2½"	65	130	75	64.5	57.5	29	3.50	7	9
917/0080	3"	80	150	85	77.5	70	32	3.75	8	9
917/0100	4"	100	180	100	101	93.5	38	3.75	8	10
917/0150	6"	150	260	140	153	144	43	4.50	10	12

TECHNICAL DATA:

Maximum Pressure:	16 BAR (230PSI) (1.6MPA)
Maximum Temperature:	200°C (392°F)
Tensile Strength:	330MPA
Hardness:	HB150 (Brinell)
Elongation Rate:	8%
Suitable Applications:	Water, Oil, Gas, Petro-Chemical
Material:	Hot Dipped Malleable Iron

LONGER LASTING Heavy duty, hot dipped galvanised
PIN HOLE FREE Individually pressure tested
TAPERED THREADS Conform to (ISO 7-1) British standards