


FIG 926 - 1000/3 SLIP FLANGE

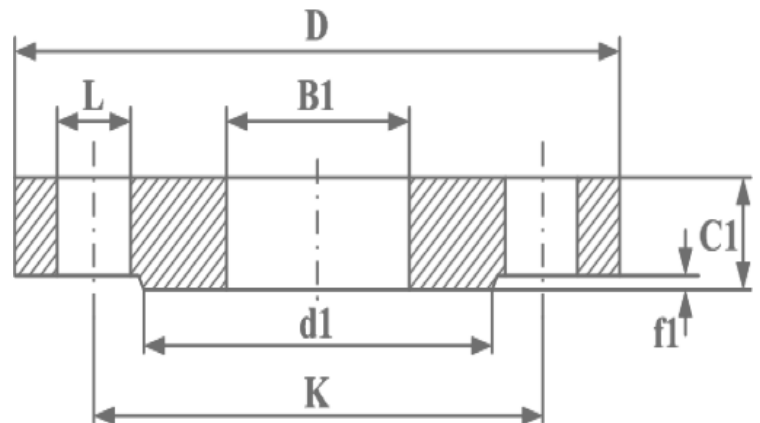

SIZE RANGE / DIMENSIONS

ITEM CODE	BSP	METRIC (mm)	B1 (mm)	D(mm)	K (mm)	C1 (mm)	d1 (mm)	f1 (mm)	L (mm)	NO. HOLES
926/0040	1½"	40	48.3	150	110	10	88	3	18	4
926/0050	2"	50	60.3	165	125	10	102	3	18	4
926/0065	2½"	65	76.1	185	145	12	122	3	18	4
926/0080	3"	80	88.9	200	160	12	138	3	18	8
926/0100	4"	100	114.3	220	180	12	158	3	18	8
926/0150	6"	150	168.3	285	240	16	212	3	22	8
926/0200	8"	200	219.1	340	295	18	263	3	22	12
926/0250	10"	250	273	395	350	20	320	3	22	12

CHEMICAL COMPONENT

C (%)	Mn (%)	P (%)	S (%)	Si (%)
0.12 - 0.20	0.30 - 0.67	≤ 0.045	≤ 0.45	≤ 0.30

TECHNICAL DATA:

Maximum Temperature:	0-350°C
Tensile Strength:	375-460MPA
Hardness:	HB120 - 140 (Brinell)
Elongation Rate:	≥26%
Suitable Applications:	Water, Oil, Gas, Petro-Chemical
Material:	Forged Carbon Steel