


FIG 950 - BLACK ELBOW 90°

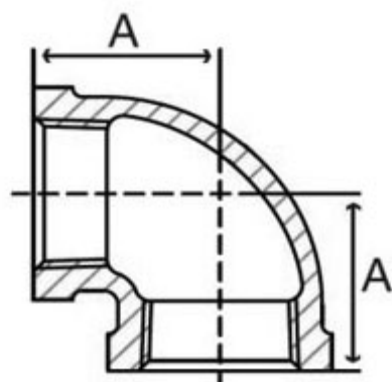

SIZE RANGE / DIMENSIONS

ITEM CODE	BSP	METRIC mm	A
950/0008	1/4"	8	19
950/0010	3/8"	10	24
950/0015	1/2"	15	27
950/0020	3/4"	20	32
950/0025	1"	25	37
950/0032	1 1/4"	32	44.5
950/0040	1 1/2"	40	49
950/0050	2"	50	57
950/0065	2 1/2"	65	65.5
950/0080	3"	80	77.5
950/0100	4"	100	96.5
950/0150	6"	150	120

TECHNICAL DATA:

Maximum Pressure:
Maximum Temperature:
Tensile Strength:
Hardness:
Elongation Rate:

16 BAR (230PSI) (1.6MPa)
200°C (392°F)
330MPa
HB150 (Brinell)
8%

Suitable Applications:
Material:

Water, Oil, Gas, Petro-Chemical
Hot Dipped Malleable Iron

LONGER LASTING Heavy duty, hot dipped galvanised
PIN HOLE FREE Individually pressure tested
TAPERED THREADS Conform to (ISO 7-1) British standards