


FIG 951 - BLACK ELBOW 90° MxF

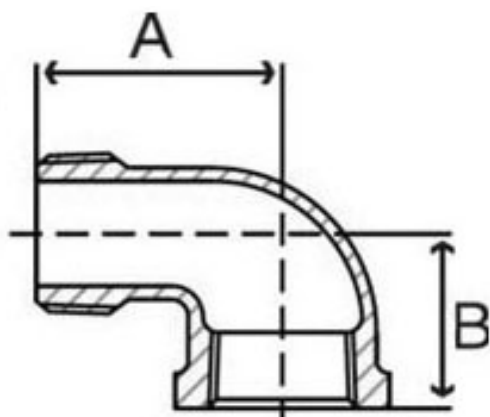

SIZE RANGE / DIMENSIONS				
ITEM CODE	BSP	METRIC mm	A	B
951/0015	½"	15	28	38
951/0020	¾"	20	33	44
951/0025	1"	25	38	52
951/0032	1¼"	32	45	60
951/0040	1½"	40	50	65
951/0050	2"	50	58	74
951/0065	2½"	65	69	90
951/0080	3"	80	78	102
951/0100	4"	100	100	122

TECHNICAL DATA:

Maximum Pressure:
Maximum Temperature:
Tensile Strength:
Hardness:
Elongation Rate:

16 BAR (230PSI) (1.6MPa)
200°C (392°F)
330MPa
HB150 (Brinell)
8%

Suitable Applications:
Material:

Water, Oil, Gas, Petro-Chemical
Hot Dipped Malleable Iron

LONGER LASTING Heavy duty, hot dipped galvanised
PIN HOLE FREE Individually pressure tested
TAPERED THREADS Conform to (ISO 7-1) British standards