


FIG 960 - BLACK REDUCING SOCKET

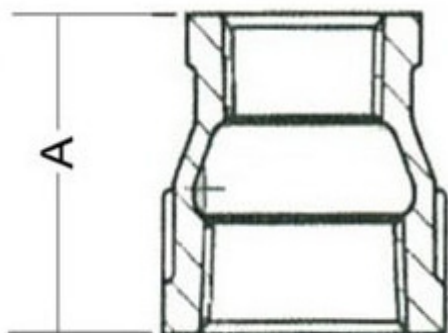

TECHNICAL DATA:

Maximum Pressure:	16 BAR (230PSI) (1.6MPA)
Maximum Temperature:	200°C (392°F)
Tensile Strength:	330MPA
Hardness:	HB150 (Brinell)
Elongation Rate:	8%

Suitable Applications:	Water, Oil, Gas, Petro-Chemical
Material:	Hot Dipped Malleable Iron

SIZE RANGE / DIMENSIONS

ITEM CODE	BSP	METRIC mm	A
960/0015x0010	½" x ¾"	15 x 10	35
960/0020x0015	¾" x ½"	20 x 15	38
960/0025x0015	1" x ½"	25 x 15	44
960/0025x0020	1" x ¾"	25 x 20	44
960/0032x0015	1¼" x ½"	32 x 15	49
960/0032x0020	1¼" x ¾"	32 x 20	49
960/0032x0025	1¼" x 1"	32 x 25	49
960/0040x0015	1½" x ½"	40 x 15	53
960/0040x0020	1½" x ¾"	40 x 20	53
960/0040x0025	1½" x 1"	40 x 25	53
960/0040x0032	1½" x 1¼"	40 x 32	53
960/0050x0015	2" x ½"	50 x 15	63
960/0050x0020	2" x ¾"	50 x 20	63
960/0050x0025	2" x 1"	50 x 25	63
960/0050x0032	2" x 1¼"	50 x 32	63
960/0050x0040	2" x 1½"	50 x 40	63
960/0065x0025	2½" x 1"	65 x 25	72
960/0065x0032	2½" x 1¼"	65 x 32	72
960/0065x0040	2½" x 1½"	65 x 40	72
960/0065x0050	2½" x 2"	65 x 50	72
960/0080x0020	3" x ¾"	80 x 20	71
960/0080x0025	3" x 1"	80 x 25	71
960/0080x0032	3" x 1¼"	80 x 32	71
960/0080x0040	3" x 1½"	80 x 40	71
960/0080x0050	3" x 2"	80 x 50	71
960/0080x0065	3" x 2½"	80 x 65	71
960/0100x0025	4" x 1"	100 x 25	84
960/0100x0032	4" x 1¼"	100 x 32	84
960/0010x0040	4" x 1½"	100 x 40	84
960/0100x0050	4" x 2"	100 x 50	84
960/0100x0065	4" x 2½"	100 x 65	84
960/0100x0080	4" x 3"	100 x 80	84

LONGER LASTING Heavy duty, hot dipped galvanised
PIN HOLE FREE Individually pressure tested
TAPERED THREADS Conform to (ISO 7-1) British standards