


FIG 963 - BLACK REDUCING TEE

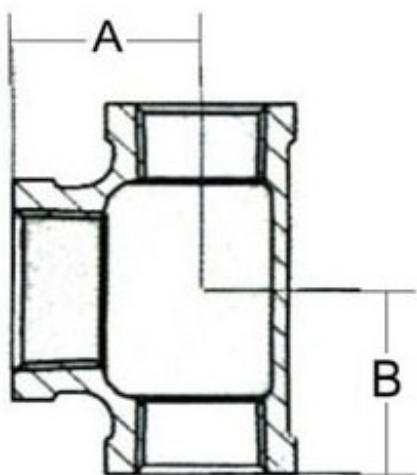

SIZE RANGE / DIMENSIONS				
ITEM CODE	BSP	METRIC mm	A	B
963/0020x0015	3/4" x 1/2"	20 x 15	29	90
963/0025x0015	1" x 1/2"	25 x 15	31	89
963/0025x0020	1" x 3/4"	25 x 20	34	86
963/0032x0015	1 1/4" x 1/2"	32 x 15	34	75
963/0032x0020	1 1/4" x 3/4"	32 x 20	36	71
963/0032x0025	1 1/4" x 1"	32 x 25	40	61
963/0040x0015	1 1/2" x 1/2"	40 x 15	35	59
963/0040x0020	1 1/2" x 3/4"	40 x 20	37	54
963/0040x0025	1 1/2" x 1"	40 x 25	41	53
963/0040x0032	1 1/2" x 1 1/4"	40 x 32	45	51
963/0050x0015	2" x 1/2"	50 x 15	37	47
963/0050x0020	2" x 3/4"	50 x 20	37	47
963/0050x0025	2" x 1"	50 x 25	43	47
963/0050x0032	2" x 1 1/4"	50 x 32	47	45
963/0050x0040	2" x 1 1/2"	50 x 40	51	43
963/0065x0025	2 1/2" x 1"	65 x 25	47	41
963/0065x0032	2 1/2" x 1 1/4"	65 x 32	49.5	41
963/0065x0040	2 1/2" x 1 1/2"	65 x 40	52	41
963/0080x0050	3" x 2"	80 x 50	61.5	40
963/0080x0065	3" x 2 1/2"	80 x 65	71.5	37
963/0100x0050	4" x 2"	100 x 50	68.5	35
963/0100x0065	4" x 2 1/2"	100 x 65	77.5	33
963/0100x0080	4" x 3"	100 x 80	82.5	30

TECHNICAL DATA:

Maximum Pressure:	16 BAR (230PSI) (1.6MPa)
Maximum Temperature:	200°C (392°F)
Tensile Strength:	330MPa
Hardness:	HB150 (Brinell)
Elongation Rate:	8%
Suitable Applications:	Water, Oil, Gas, Petro-Chemical
Material:	Hot Dipped Malleable Iron

LONGER LASTING Heavy duty, hot dipped galvanised
PIN HOLE FREE Individually pressure tested
TAPERED THREADS Conform to (ISO 7-1) British standards