


FIG 971 - BLACK UNION CONICAL



SIZE RANGE / DIMENSIONS			
ITEM CODE	BSP	METRIC mm	A
971/0015	½"	15	46
971/0020	¾"	20	50
971/0025	1"	25	56
971/0032	1¼"	32	63
971/0040	1½"	40	68
971/0050	2"	50	76
971/0065	2½"	65	83
971/0080	3"	80	93
971/0100	4"	100	113.5

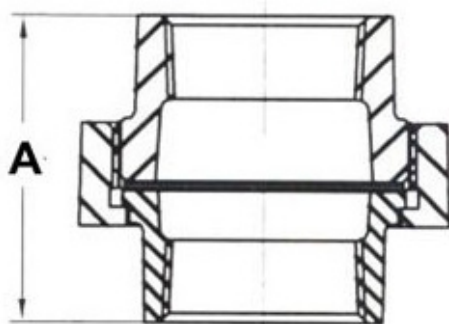

TECHNICAL DATA:

Maximum Pressure:
Maximum Temperature:
Tensile Strength:
Hardness:
Elongation Rate:

16 BAR (230PSI) (1.6MPa)
200°C (392°F)
330MPa
HB150 (Brinell)
8%

Suitable Applications:
Material:

Water, Oil, Gas, Petro-Chemical
Hot Dipped Malleable Iron

LONGER LASTING Heavy duty, hot dipped galvanised
PIN HOLE FREE Individually pressure tested
TAPERED THREADS Conform to (ISO 7-1) British standards