


FIG 973 - BLACK HOLLOW PLUG

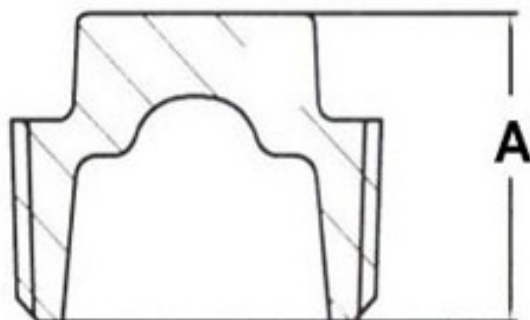

SIZE RANGE / DIMENSIONS

ITEM CODE	BSP	METRIC mm	A
973/0010	3/8"	10	18
973/0015	1/2"	15	21
973/0020	3/4"	20	23
973/0025	1"	25	26
973/0032	1 1/4"	32	30
973/0040	1 1/2"	40	31
973/0050	2"	50	36
973/0065	2 1/2"	65	46
973/0080	3"	80	48
973/0100	4"	100	57

TECHNICAL DATA:

Maximum Pressure:

16 BAR (230PSI) (1.6MPa)

Maximum Temperature:

200°C (392°F)

Tensile Strength:

330MPa

Hardness:

HB150 (Brinell)

Elongation Rate:

8%

Suitable Applications:

Water, Oil, Gas, Petro-Chemical

Material:

Hot Dipped Malleable Iron

LONGER LASTING Heavy duty, hot dipped galvanised
PIN HOLE FREE Individually pressure tested
TAPERED THREADS Conform to (ISO 7-1) British standards