


FIG 927 - TABLE D SLIP FLANGE

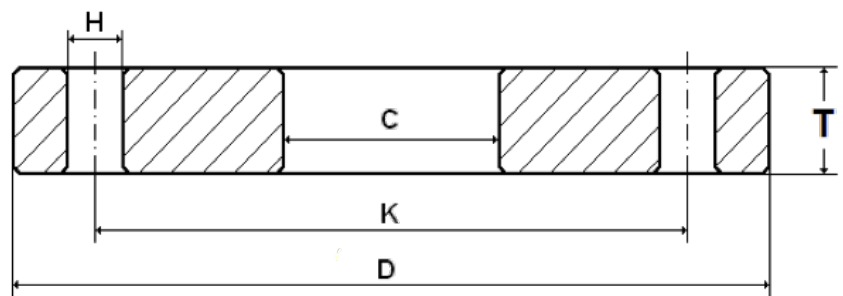

SIZE RANGE / DIMENSIONS

ITEM CODE	BSP	METRIC (mm)	D (mm)	C(mm)	T(mm)	H (mm)	K (mm)	NO. HOLES
927/0040	1½"	40	133.4	50	6.3	14.3	98.4	4
927/0050	2"	50	152.4	62	7.9	17.5	114.3	4
927/0065	2½"	65	165.1	78	7.9	17.5	127	4
927/0080	3"	80	184.1	91	9.5	17.5	146	4
927/0100	4"	100	215.9	116	9.5	17.5	177.8	4
927/0150	6"	150	279.4	168	12.7	17.5	235	8
927/0200	8"	200	336.6	221	12.7	17.5	292.1	8
927/0250	10"	250	406.4	276	15.9	22.2	355.6	8

CHEMICAL COMPONENT

C (%)	Mn (%)	P (%)	S (%)	Si (%)
0.12 - 0.20	0.30 - 0.67	≤ 0.045	≤ 0.45	≤ 0.30

TECHNICAL DATA:

Maximum Temperature:	0-350°C
Tensile Strength:	375-460MPA
Hardness:	HB120 - 140 (Brinell)
Elongation Rate:	≥26%
Suitable Applications:	Water, Oil, Gas, Petro-Chemical
Material:	Forged Carbon Steel